



1800 GSM/3G/4G/5G Wireless Network Amplifier Boost Signal Strength with Signal Extender cell signal booster for metal bu

Basic Information

Place of Origin: Guangdong, China
Brand Name: GREEMBLT
Model Number: JY811

Price: \$92.80/sets 1-9 setsPackaging Details: Normal packing



Product Specification

Type: 4G Signal BoosterNetwork: 4g, GSM, 3G

Product Name: Mobile Signal Booster

• Frequency: 1800


Function: Signal Extender
Output Power: 27-30dBm
Gain: 75-80dB
Coverage: 5000sqm
Application: Office
Weight: 6.5KG

• Size: 285*260*58mm


• Warranty: 2 Years

• Highlight: 1800 signal booster, 1800 signal extender,

gsm signal booster



More Images










Stronger Signals, Smoother Communication










Specification

Model	JY811	
Frequency Range	Uplink	Downlink
700MHz	699-716MHz	729-726MHz
850MHz	824-849MHz	869-894MHz
800MHz	832-862MHz	791-821MHz
900MHz	880-915MHz	925-960MHz
1700MHz	1710-1755MHz	2100-2155MHz
1800MHz	1710-1785MHz	1805-1880MHz
1900MHz	1850-1910Mhz	1930-1990MHz
2100MHz	1920-1980MHz	2110-2170MHz
2600MHz	2500-2570MHz	2620-2690MHz
2300MHz	2300MHz	2400MHz
2500Mhz	2495MHz	2695MHz
3500MHZ	3300MHz	4200MHz
Max. Gain	75dB ±1.5dB	80dB±1.5dB
Max. Output Power	25dBm±1.5dB	27dBm±1.5dB
Band width	Wide Band	
Manual Gain Control	31dB,1dB step	
ALC	>25dB	
Ripple in Band	≤8dB	
Noise Figure	≤6dB	
VSWR	≤2.0	
RF Connector	N-Female	
Time Delay	≤1.5 µs	
Frequency stability	≤0.01ppm	
MTBF	> 50000 hours	
Impedance	50 ohm	
Power Supply	AC 90-264V or 100-240V,DC 10V or 12V,50/60Hz	
Humidity	<90%	
Operating Temperature	-10°C ~ +55°C	
Environment Conditions	IP40	
Installation Type	Wall Installation	
Product Size	285*260*58mm	
Package Size	450*310**85mm	
BTS	interface for receiving antennas	
MS	transmitting antenna interface	

Installation Instructions

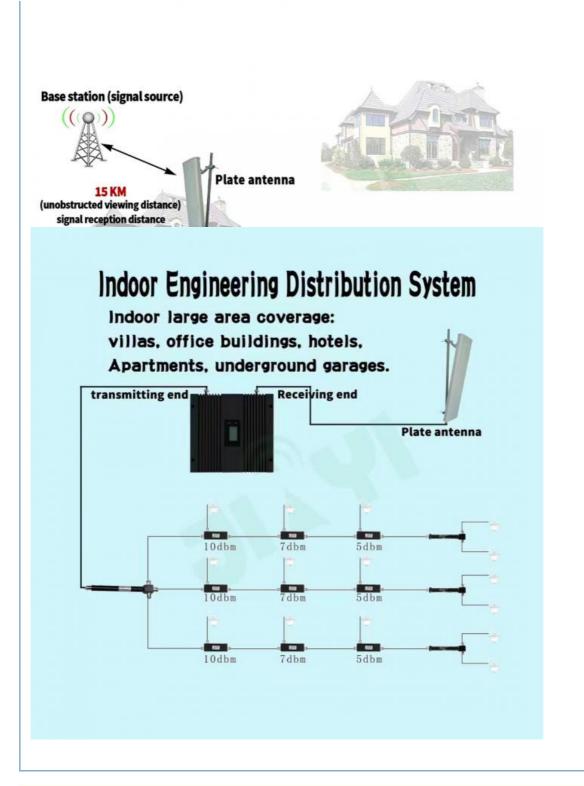





+86 18825260857



18825260857@163.com



signals-booster.com