




CDMA Cellular Signal Booster Greatest 500m2 Coverage 5g Cell Phone Booster

Our Product Introduction

for more products please visit us on signals-booster.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: GREEMBLT
- Model Number: JY-816
- Price: \$78.60/sets 1-9 sets
- Packaging Details: Normal Carton Package
- Supply Ability: 1000 Piece/Pieces per Week

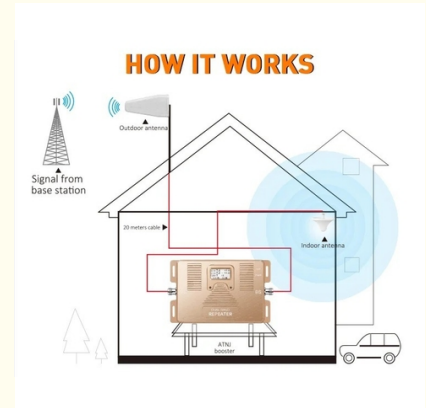

Product Specification

- Type: Dual Band Signal Booster
- Network: 4g, GSM, 3G, LTE
- Product Name: Mobile Signal Repeater
- Frequency: 850 /1900 MHz Or Customized
- Gain: 70dB±3DB
- Frequency Customized: Cover All Bands Customized
- Max Output Power: 23dBm±3dBm
- Function: Cell Phone Signal Booster
- Color: White Or Black Or Golden Available Or Customized
- Coverage Area: 500m2
- Package Size: 225mmx140mmx32mm
- Cellular Networks: 2G/3G/4G Lte
- Highlight: **CDMA Cellular Signal Booster, Cellular Signal Booster Greatest 500m2, 500m2 Coverage 5g Cell Phone Booster**



More Images



Product Description

Greatest 500m2 Coverage Area 2G/3G/4G Lte Cellular Signal Booster for CDMA Cellular Networks

Product Description



CEILING ANTENNA
1PCS



LOGARITHM OUTDOOR
ANTENNA 1PCS



CABLE 3 METERS
1PCS




CABLE 10 METERS
1PCS



POWER ADAPTER
1PCS

INTELLIGENT DISPLAY

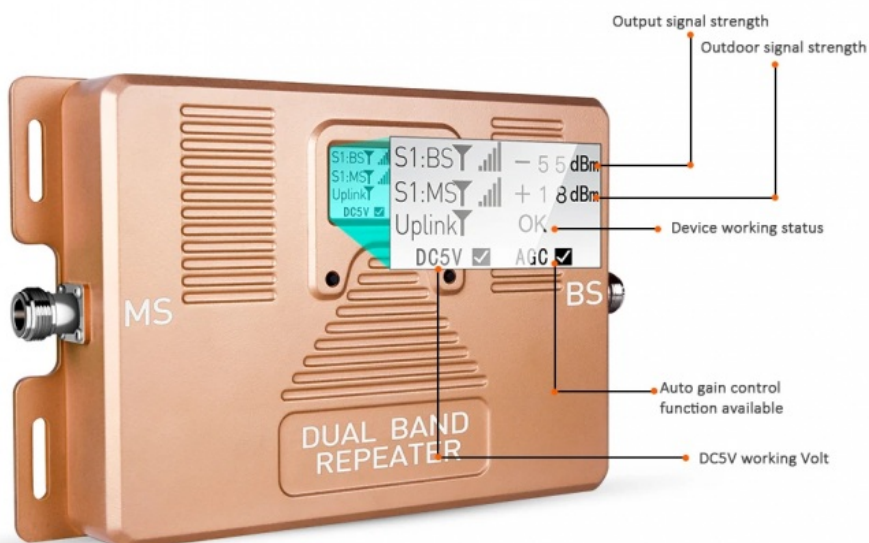



FASHION BEAUTY

Dual band mobile signal repeater


Full Intelligent LCD with AGC+ALC

Higher Gain ,Coverage 350m2

3 Years warranty



HOW IT WORKS

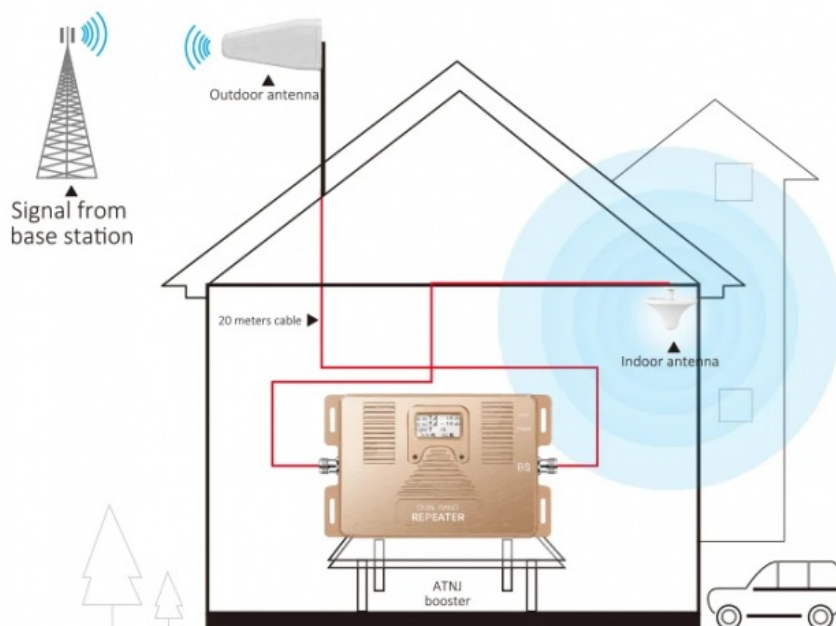

Specification

SPECIFICATIONS		Mobile Signal Booster				PARAMETERS
	850/1800Mhz	850/2100Mhz	850/AWS	800/900Mhz	850/1900Mhz	
	824-849/1710-1785Mhz	824-849/1920-1980Mhz	824-849/1710-1755Mhz	832-862/890-915Mhz	824-849/1850-1910Mhz	
Frequency Range	869-894/1805-1880Mhz	869-894/2110-2170Mhz	869-894/2110-2155Mhz	791-821/935-960Mhz	869-894/1930-1990Mhz	
(Customers to Choose)	800/1800Mhz	900/1800Mhz	900/2100Mhz	1800/2100Mhz	800/2100Mhz	
	832-862/1710-1785Mhz	890-915/1710-1785Mhz	890-915/1920-1980Mhz	1710-1785/1920-1980Mhz	832-862/1920-1980Mhz	
	791-821/1805-1880Mhz	935-960/1805-1880Mhz	935-960/2110-2170Mhz	1805-1880/2110-2170Mhz	791-821/2110-2170Mhz	
Gain		≥70dB				
Automatic gain control (Step Attenuation)		31dB @1dB/Step				
MGC(Step Attenuation)		25dB @1dB/Ster				
Auto Gain Control		20dB Mir				
Output Power		22dBm				
≤-15dBm/30kHz						
Spurious Emission		9kHz~1GHz:≤-36dBm/30kHz				
1GHz~12.75GHz:≤-30dBm/30kHz						
Inter-Modulation Attenuation ACPR		≤-38dBc/30kHz(measured under rated output power)				
In-band Ripple		≤5dB				
VSWR		≤2				
/0 Impedance		50 Ω				
Noise Figure		≤5dB				
System Delay		≤5μs				
RF Connector(Customers to Choose)		N-Type (Female)				
Operating Temperature		Operation:-10°C~+55°C/Storage:-20°C~+60°				
Power Supply adapter		AC110~220V±20%,50/60Hz,DC5V/2A power				
Dimensions		225*140*32(mm)				
Weight		≤1.5kg				
Accessories & Installation						



Search a location where can receive good signal ($\geq -70\text{dB}$).
Install outdoor antenna, towards to the base station or cell tower.



Connect indoor antenna to the booster "Mobile" side by cable.
(Outdoor antenna to the booster "BTS" side.)



Please check if all connectors are connected well after assembled.
And turn on the power.

Application



 **Shenzhen Jiayi Technology Co., Ltd.**

 +86 18825260857

 18825260857@163.com

 signals-booster.com

Factory Building 407, Building B, No. 41, Lixin Road, Danzhotou Community, Nanwan Street, Longgang District,
Shenzhen City, Guangdong Province, PR China Zip 518000

