



85dB Gain 4G Signal Booster 850HZ Mobile Signal Amplifier For Stronger Cell Signal

Our Product Introduction

for more products please visit us on signals-booster.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: GREEMBLT
- Model Number: JY811
- Price: \$128.50/sets 1-9 sets
- Packaging Details: Normal packing




Product Specification

- Type: 4G Signal Booster
- Network: 4g, GSM, 3G
- Product Name: Mobile Signal Booster
- Frequency: 850HZ
- Function: Signal Extender
- Output Power: 30dBm
- Gain: 85dB
- Coverage: 5000sqm
- Application: Office
- Weight: 6.5KG
- Size: 285*260*58mm
- Warranty: 2 Years
- Highlight: 4g signal booster 850hz, 850hz mobile signal amplifier, 85db gain 4g signal booster




More Images



Product Description

285*260*58mm 4G Signal Booster 850HZ Mobile Signal Amplifier for Stronger Cell Signal

Stronger Signals, Smoother Communication



Our Product Introduction

for more products please visit us on signals-boosters.com

| Model | JY811 | |
|------------------------|--|--------------|
| Frequency Range | Uplink | Downlink |
| 700MHz | 699-716MHz | 729-726MHz |
| 850MHz | 824-849MHz | 869-894MHz |
| 800MHz | 832-862MHz | 791-821MHz |
| 900MHz | 880-915MHz | 925-960MHz |
| 1700MHz | 1710-1755MHz | 2100-2155MHz |
| 1800MHz | 1710-1785MHz | 1805-1880MHz |
| 1900MHz | 1850-1910Mhz | 1930-1990MHz |
| 2100MHz | 1920-1980MHz | 2110-2170MHz |
| 2600MHz | 2500-2570MHz | 2620-2690MHz |
| 2300MHz | 2300MHz | 2400MHz |
| 2500Mhz | 2495MHz | 2695MHz |
| 3500MHZ | 3300MHz | 4200MHz |
| Max. Gain | 75dB ±1.5dB | 80dB±1.5dB |
| Max. Output Power | 25dBm±1.5dB | 27dBm±1.5dB |
| Band width | Wide Band | |
| Manual Gain Control | 31dB,1dB step | |
| ALC | >25dB | |
| Ripple in Band | ≤ 8dB | |
| Noise Figure | ≤ 6dB | |
| VSWR | ≤ 2.0 | |
| RF Connector | N-Female | |
| Time Delay | ≤ 1.5 μs | |
| Frequency stability | ≤ 0.01ppm | |
| MTBF | > 50000 hours | |
| Impedance | 50 ohm | |
| Power Supply | AC 90-264V or 100-240V,DC 10V or 12V,50/60Hz | |
| Humidity | < 90% | |
| Operating Temperature | -10°C ~ +55°C | |
| Environment Conditions | IP40 | |
| Installation Type | Wall Installation | |
| Product Size | 285*260*58mm | |
| Package Size | 450*310**85mm | |
| BTS | interface for receiving antennas | |
| MS | transmitting antenna interface | |

Our Customers



Base station (signal source)



15 KM
(unobstructed viewing distance)
signal reception distance

Plate antenna



Plate antenna



3 km

Signal transmission distance
(no blocking distance)

20M cable

10M cable


repeater

Indoor Engineering Distribution System

Indoor large area coverage:


villas, office buildings, hotels.

Apartments, underground garages.

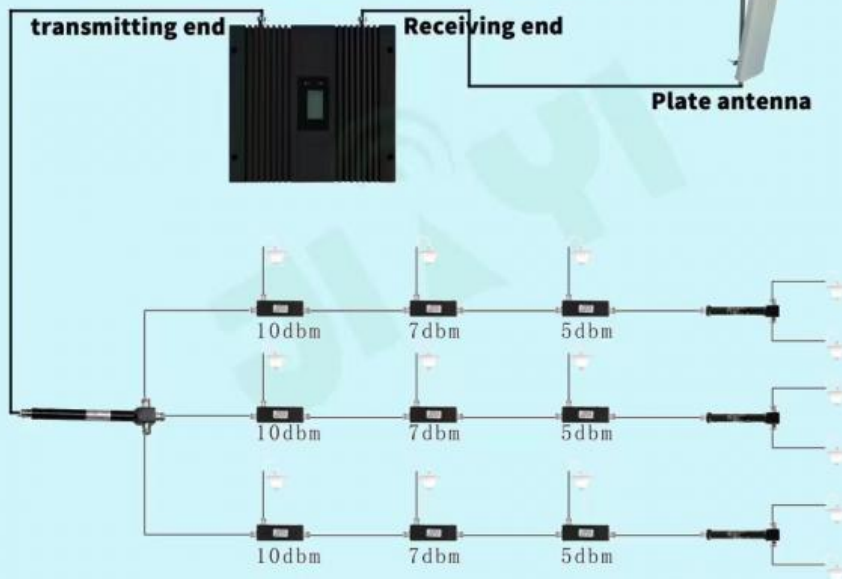

 +86 18825260857

 18825260857@163.com

 signals-booster.com

Factory Building 407, Building B, No. 41, Lixin Road, Danzhutou Community, Nanwan Street, Longgang District,
Shenzhen City, Guangdong Province, PR China Zip 518000