



# Dual Tri Quad Band Repeater 26dBm Five Frequency Industrial Signal Booster

#### **Basic Information**

Place of Origin: Guangdong, China

Brand Name: JIAYIModel Number: JY836A

• Price: \$168.00/sets 1-19 sets

Packaging Details: Normal pack



## **Product Specification**

Type: 4G Signal BoosterNetwork: 4g, GSM, 3G

• Gain: 80dB

• Frequency: 900/1800/2100MHz

• Power: 26dBm

Max Output Power: +23dBm/±3DBM Total Power
 Coverage Area: 1000-1500 Square Meters

Cellular Networks: 2g/3g/4gColor: Black

• Package Size: 45cm\*35cm\*25cm

Package Weight: 6kgQuality Warranty: 24month

• Highlight: Quad Band Repeater 26dBm,

Five Frequency Industrial Signal Booster,

26dBm Industrial Signal Booster



## More Images









#### **Product Description**

To choose from, we have single frequency dual frequency triband frequency quad frequency five frequency device, high po

To choose from, we have single frequency dual frequency triband frequency quad frequency five frequency device , high power high gain device, with AGC ALG device...

Single band frequency:

900,1800,2100,FDD2600,850,800,700,1900,1700,TDD2600,TDD2300,TDD1900

Dual band frequency:

900/1800,900/2100,1800/2600,850/1900,800/1800,850/1700,1800/2100,900/2300,1800/2300,1700/2100

Triband frequency:

900/1800/2100,850/1800/2100,900/1800/2600,900/2100/2600,1800/2100/2600

Quad band frequency:

850/900/1800/2100,900/1800/2100/2600,700(B28)/900/1800/2100.

Five band frequency:

850/900/1800/2100/2600,800/850/900/1800/2100,850/900/1800/1900/2100,800/700/900/1800/2100,900/1800/2100/2300/850.

A mobile phone signal repeater provides the ultimate solution in any area where cellular communications can not work well due to

leak of signals.

Introduction of Mobile Phone Signal Repeater


- 1. Enhance Mobile Phone Signal Strength
- 2. Improve Communication Quality
- 3. Reduce Cellphone Radiation
- 4. Protract Cellular Battery Life
- 5. Economic Building Cost
- 6. Easy Operation
- 7. Easy Installation
- \* With unique appearance design, good cooling function
- \* With MGC (Manual Gain Control) function, you can adjust the gain as needed;
- \* With DL signal LED display, help to install the outdoor antenna at the best state;
- \* With AGC and ALC, make repeater work stable.
- \* PCB with isolation function, make UL and DL signal not influence each other,
- \* Low intermodulation, high Gain, stable output power

**Product Description** 







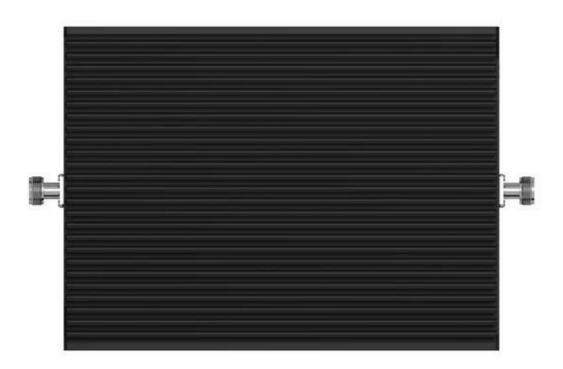

# Specification

item value

Place of Origin Guangdong China

Brand Name JIAYI Model Number JY836A Operating Temperature -10 -60 Gain 80DB

 Frequency
 900/1800/2100MHZ

 Package Size
 45cm×35cm×25cm

Max Output Power +23dBm/±3DBM Total power

Color Black
Package Weight 5kg

Coverage area 1500 Square Meters

Quality warranty 24month

#### Accessories and Installation



Search a location where can receive good signal (≥ -70dB).

Install outdoor antenna, towards to the base station or cell tower.



Connect indoor antenna to the booster "Mobile" side by cable. (Outdoor antenna to the booster "BTS" side.)



Please check if all connectors are connected well after assembled. And turn on the power.

# Application



Packing & Delivery

# Greemblt Shenzhen Jiayi Technology Co., Ltd.

+86 18825260857



18825260857@163.com



e signals-booster.com

Factory Building 407, Building B, No. 41, Lixin Road, Danzhutou Community, Nanwan Street, Longgang District, Shenzhen City, Guangdong Province, PR China Zip 518000