

Boost Your Mobile Network with 4G Signal Booster CDMA850/GSM900mhz/DCS1800/FDD2600MHZ

Basic Information

- Place of Origin:
- Brand Name:
- Mode
- Price:
- Packa

| JY811 |
|---|
| 90.00/pieces 1-19 pieces |
| Carton size for 1 kit:24*28*34cm Carton size for 2 kits:46*36*26cm Carton size for 10 kits:70*45*45cm |
| 000 Piece/Pieces per Week |
| |

JIAYI

Guangdong, China



Product Specification

- Type:
- Network: • Product Name: • Frequency:
- Function:
- Gain:
- Output Power:
- Application:
- Warranty:
- Coverage:
- Port:
- Highlight:
- 4G Signal Booster GPRS, 4g, GSM, 3G Signal Repeater 900mhz/1800mhz/2100mhz/2600mhz Signal Extender 80dB 27-30dbm Home Office Farm Hotel Ship
- 2 Years
- 3KM Shenzhen
 - gsm900mhz 4g signal booster, gsm900mhz industrial signal booster,

gsm 4g signal booster

JIRYI



More Images

JIRYI








specification

| Frequency Range | | Uplink | Downlink |
|---------------------|------------|-----------------------|--------------|
| LTE 800MHz | | 832-862MHz | 791-821MHz |
| GSM900MHz | | 890-915MHz | 935-960MHz |
| 1800MHz | | 1710-1785MHz | 1805-1880MHz |
| 2100MHz | | 1920-1980MHz | 2110-2170MHz |
| 2600MHz | | 2500-2570MHz | 2630-2690MHz |
| Max. Gain | | 75dB ±1.5dB | 80dB±1.5dB |
| Max. Output Power | | 22dBm±1.5dB | 27dBm±1.5dB |
| Band width | | Wide Band | |
| Manual Gain Control | | 31dB | |
| ALC | | >25dB | |
| Ripple in Band | | ≤ 8dB | |
| Noise Figure | | ≤ 6dB | |
| VSWR | | ≤ 2.0 | |
| Intermodulation | | ≤ -40dBc | |
| Spurious Emission | 9KHz~1GHz | ≤ -36dBm | |
| | 1~12.75GHz | ≤ -30dBm | |
| Time Delay | | ≤ 1.5 µs | |
| Frequency stability | | ≤ 0.01ppm | |
| MTBF | | > 50000 hours | |
| Impedance | | 50 ohm | |
| Power Supply | | AC 90-264V,DC 10V/10A | |
| Power LED | | Power indicator | |

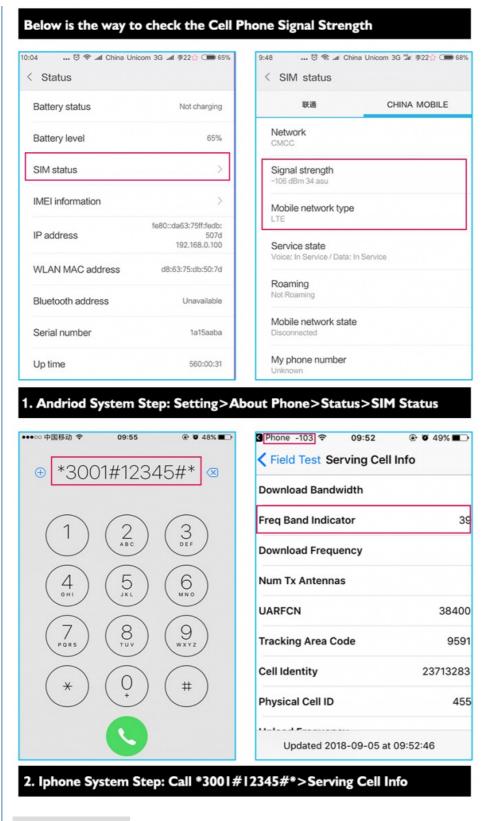

Product Description



Have you ever felt irritable because of the weak signal on your phone? The signal booster can help you to solve the problem.

<section-header>

Before Installation

After Installation

Contact: COCO Wechat: 18025474587 WhatsApp: +86 18025474587 E-mail:jycoco18025474587(@)126.com

Best selling mobile network booster CDMA850/GSM900mhz/DCS1800/FDD2600MHZ high gain 4g gsm signal booster

Picture show:














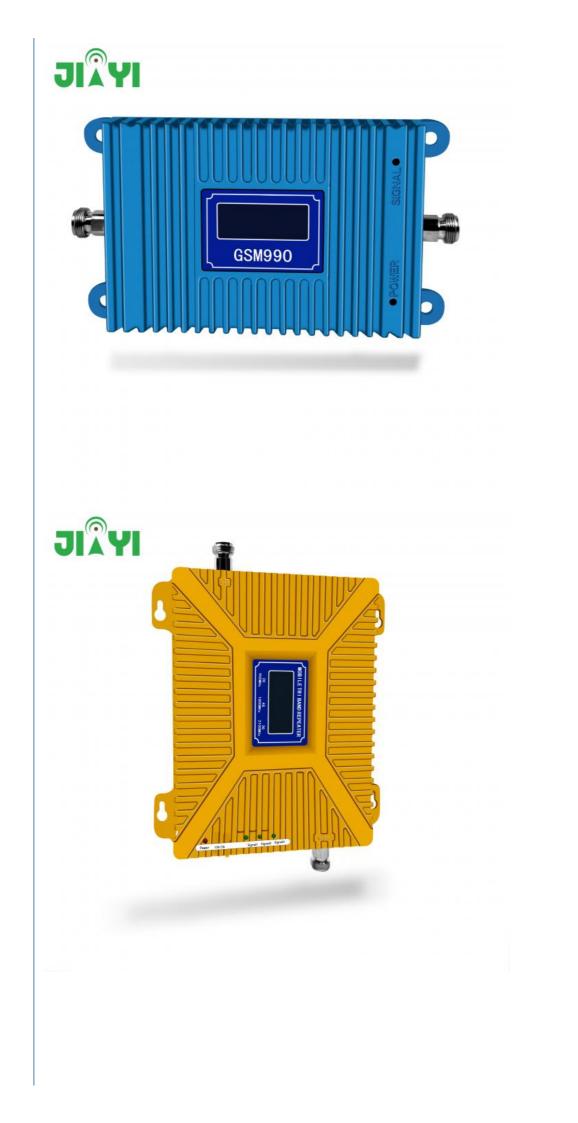



Installation

Installation Method:


1. Find the strongest direction and position of the received signal for mobiles at the top or the periphery of the building, as the location for installing the outdoor antenna, pay attention that the location should be paid to lightning protection. The installation height should not be higher than the lightning protection network of the building. If it is higher than the lightning protection network. If it is necessary, install a lightning rod 1 meter above the outdoor antenna and ground it well.

2. After selecting the appropriate location, fix the outdoor antenna to the wall or bracket. 3. Select an appropriate location in the relevant indoor location (close to the power supply and the outdoor antenna end, rain-proof, sunshine-proof and ventilation is best location) install indoor straight machine, and fixed to the wall or bracket.

4. Lead the outdoor antenna to the 'BTS' (outdoor) interface, and the connection between the outdoor antenna and the amplifier is completed.

5. After defining the indoor antenna installation position, fix the antenna.

6. The indoor antenna connected to the amplifier, one port connecting to the indoor antenna interface, and the other port connecting to the repeater's 'MOBILE' (indoor) port.

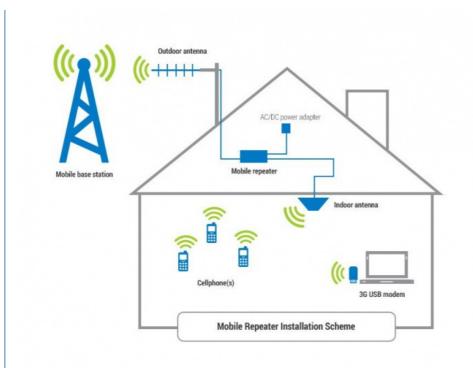

Company Profile








Jiayi Technology, a leading manufacturer of signal amplifiers, located in Shenzhen city of China, over the past 10 years, its signal amplifier products have been exported to North America, Europe, the Middle East and Asia, and are well recognized by the industry. Through years of technical accumulation, Jiayi technology has launched a series of 2G/3G/4G/5G signal amplifiers, and will continue to provide customers with high-quality products and services.

Packaging & Shipping

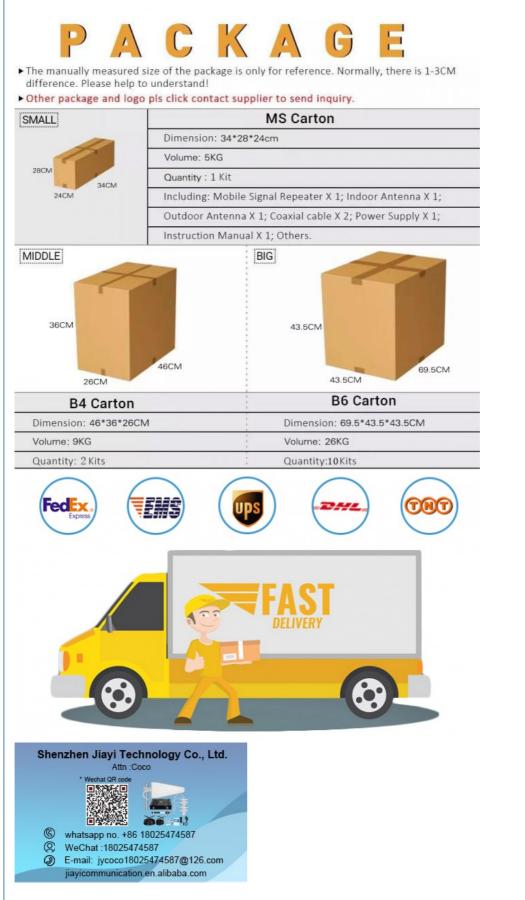

Dear Friend

Welcome to our shop,hope you have a good shopping !All of our products already checked with QC Before send out, and normally instock .All of our products can use for all over the world just match the frequency.Wholesale Consumer Pls contact us before your order,Because we will give the best price to you.Our products have good sale in Alipexpress.The frequency for you choose,SupportOEM,ODM.Support frequency customization, To choose from, we have single frequency dual frequency triband frequency quad frequency five frequency device , high power high Please contact us if you have any need. gain device, with AGC ALG device...

Single band frequency : 900,1800,2100,FDD2600,850,800,700,1900,1700,TDD2600,TDD2300 ,TDD1900 Dual band frequency :

| 900/1800,900/2100,1800/2600,850/1900,800/1800,850/1700,1800/2100,900/2300,1800/2300,1700/2100 Triband frequency : 900/1800/2100,850/1800/2100,900/1800/2600,900/2100/2600,1800/2100/2600 Quad band frequency : 850/900/1800/2100,900/1800/2100/2600,700(B28)/900/1800/2100. Five band frequency : 850/900/1800/2100/2600,800/850/900/1800/2100,850/900/1800/1900/2100,800/700/900/1800/2100,900/1800/2100/2300/850. | | | | |
|---|--|--|--|--|
| Greemblt Shenzhen Jiayi Technology Co., Ltd. | | | | |
| +86 18825260857 18825260857@163.com signals-booster.com Factory Building 407, Building B, No. 41, Lixin Road, Danzhutou Community, Nanwan Street, Longgang District, Shenzhen City, Guangdong Province, PR China Zip 518000 | | | | |